

Wireless 2-Input Pulse Counter Interface R718H2 Data Sheet

Wireless Sensor Network Based on LoRa Technology



Copyright©Netvox Technology Co., Ltd.

This document contains proprietary technical information which is the property of NETVOX Technology and is issued in strict confidential and shall not be disclosed to others parties in whole or in parts without written permission of NETVOX Technology.

The specifications are subjected to change without prior notice.

Introduction

This device is connected with 2 pulse detection interfaces which can calculate the number of pulses and send the number of detected pulses to the gateway for display. It adopts SX1276 wireless communication module.

Main characteristic

- Adopt SX1276 wireless communication module
- 2 section of ER14505 battery in parallel (AA SIZE 3.6V / section)
- Host protection level IP65/ IP67 (optional)
- The base is attached with a magnet that can be attached to a ferromagnetic material object
- 2-input pulse count detection
- External pulse voltage $\leq 3.3V$
- Compatible with LoRaWAN™ Class A
- Frequency hopping spread spectrum technology
- Configuring parameters and reading data via third-party software platforms, and set alarms via SMS text and email (optional)
- Applicable to third-party platforms: Actility / ThingPark, TTN, MyDevices / Cayenne
- Low power consumption and long battery life

Note*:


Battery life is determined by the sensor reporting frequency and other variables, please refer to http://www.netvox.com.tw/electric/electric_calc.html

On this website, users can find battery life of various models in different configurations.

Application

- The interface for pulse detection and counting

Dimension

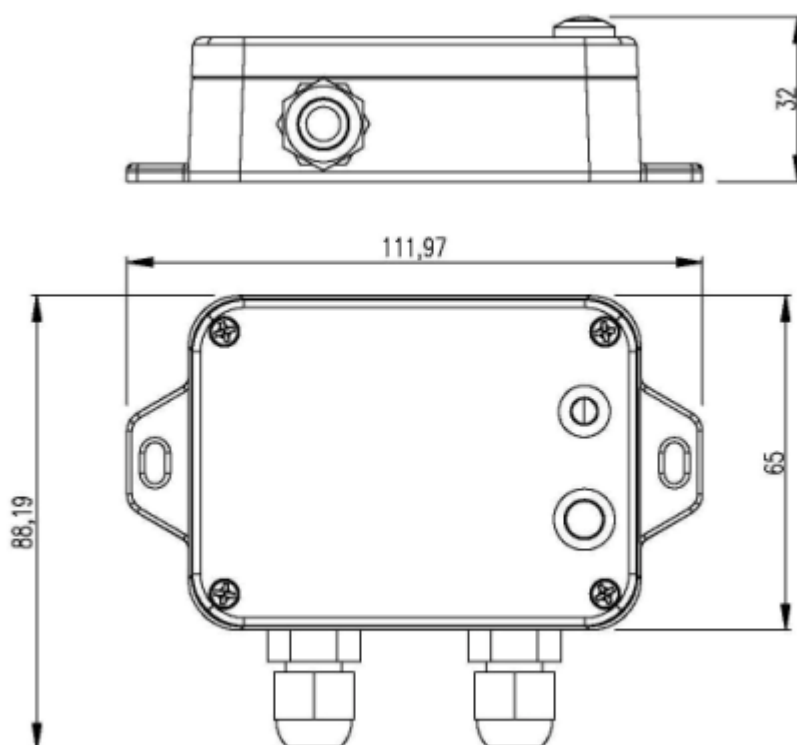

Electric

Power Supply	2 x ER14505 AA lithium batteries (3.6V 2400mah/section) Specific specifications are subject to actual shipment.
Battery Life	5 years (Conditions: ambient temperature 25 °C, 15 min report once, TX power = 20dBm, LoRa spreading factor SF = 10)
Standby Current	24uA
Wakeup Current	Wakeup current range 0.8mA-20 mA * When not transmitting /receiving LoRa data
Battery Measurement Accuracy	±0.1V

Module-R100H

Wake-up Current	0.8mA - 8mA@3.3V
RF Receiving Current (max)	11mA/3.3V
RF Transmitting Current (max)	120mA/3.3V

*Specific electrical characteristics will vary depending on the power supply voltage.

Wireless 2-Input Pulse Counter Interface

Frequency

Frequency Range	863MHz-928MHz 470MHz-510MHz
TX Power	US915 20dbm AS923 16dbm AU915 20dbm CN470 19.15dbm EU868 16dbm KR920 14dbm IN865 20dbm
Receiving Sensitivity	-136dBm (LoRa, Spreading Factor=12, Bit Rate = 293bps) -121 dBm (FSK, Frequency deviation=5kHz, Bit Rate=1.2kbps)
Antenna Type	Built-in antenna
Communication Distance	Up to 10 km (visible linear obstacle-free transmission distance, actual transmission distance depends on the environment)
Data Transfer Rate	0.3kbps to 50kbps
Modulation System Mode	LoRa/FSK (Note: choose one of them)
Supportable LoRaWAN Band	EU863-870, US902-928, AU915-928, KR920-923, AS923, CN470-510 (Note: The frequency band is optional and needs to be configured before shipment)

Physical

Dimension	L: 112 mm*W: 88.19 mm*H: 32 mm
Host Body Weight	About 160g
Ambient Temperature Range	-20 °C to 55°C
Ambient Humidity Range	<90% RH (no condensation)
Storage Temperature Range	-40 °C to 85°C