

# Wireless 4-Input 0-10V ADC Sampling Interface

## R718KBA Datasheet

---

Wireless Network Based on LoRa Technology



**Copyright©Netvox Technology Co., Ltd.**

This document contains proprietary technical information which is the property of NETVOX Technology and is issued in strict confidential and shall not be disclosed to others parties in whole or in parts without written permission of NETVOX Technology. The specifications are subjected to change without prior notice.

---

**Wireless 4-Input 0-10V ADC Sampling Interface (powered by 2 x ER14505 3.6V Lithium AA battery)**

---

## Introduction

R718KBA can connect with 4 devices and measure 0 to 10V voltage. With 24-bit ADC sampling and less than 1% error, the R718KB series gives users highly accurate measurement results. When connecting with sensors or instrumentation, the R718KB series automatically converts data with attributes set first so that users can read data easily. Precise results and convenient data conversion, the R718KB series makes measurements easier and more accurate than you ever imagined.

## Features

- 0–10V detection with 4 external devices connected
- 24-bit ADC sampling
- <1% error for 0.5–10V detection
- SX1262 wireless communication module
- 2\* AA 3.6V ER14505 battery in parallel
- IP67
- Magnetic base
- Compatible with LoRaWANTM Class A
- Frequency hopping spread spectrum technology
- Applicable to third-party platforms: Actility / ThingPark, TTN, MyDevices / Cayenne
- Low power consumption and long battery life

Note: Please visit [http://www.netvox.com.tw/electric/electric\\_calc.html](http://www.netvox.com.tw/electric/electric_calc.html) for more information of battery lifespan.


## Applications

- Sensors
- Measuring instruments
- Instrumentation

# Wireless 4-Input 0-10V ADC Sampling Interface (powered by 2 x ER14505 3.6V Lithium AA battery)

## Dimensions

112mm (L) x 65mm (W) x 32mm (H)

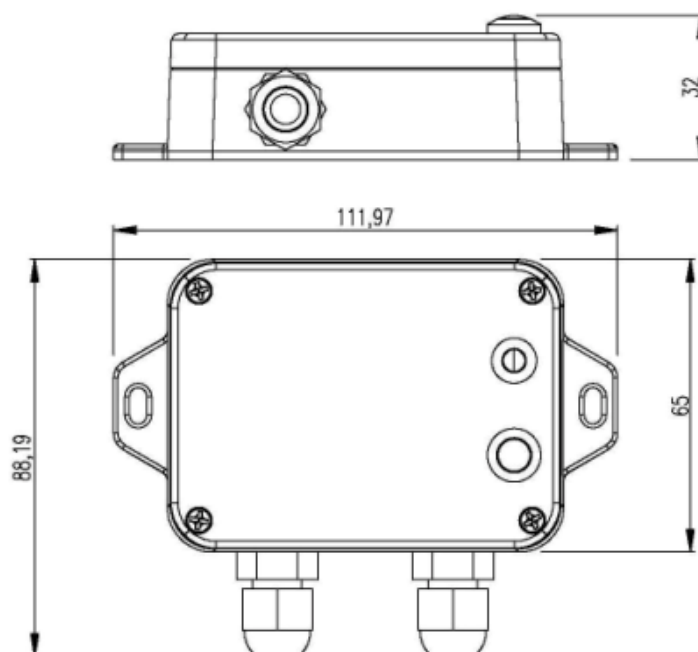

## Electrical Specifications

Power Supply	2* AA 3.6V ER14505 battery in parallel
Battery Lifespan	5.4 years (when the temperature = 25°C, report once every 30 minutes, TX power = 20dBm, and LoRa spreading factor SF = 10)
Standby Current	20μA
Wake-up Current	6.3mA@3.3V
RF Receiving Current	11mA @3.3V
RF Transmitting Current	120mA @3.3V
Battery Measurement Error	±0.1V
0–10V Measurement Error	0.5–10V: <1%; 0–0.5V: <2%
Resolution	Voltage: 1mV

Note: The electrical specifications may vary due to the voltage of the power supply.

**Wireless 4-Input 0-10V ADC Sampling Interface (powered by 2 x ER14505 3.6V Lithium AA battery)**

## Frequency

Frequency Range	863MHz-928MHz 470MHz-510MHz
Tx Power	US915 20dbm AS923 16dbm AU915 20dbm CN470 19.15dbm EU868 16dbm KR920 14dbm IN865 20dbm
Rx Sensitivity	-136dBm (LoRa, Spreading Factor = 12, Bit Rate = 293bps) -121dBm (FSK, Frequency deviation = 5kHz, Bit Rate = 1.2kbps)
Antenna Type	Built-in antenna
Communication Range	10km (line of sight) Note: The actual transmission distance depends on the environment.
Data Transfer Rate	0.3kbp–50kbps (LoRa); 1.2kbps–300kbps (FSK)
Modulation	LoRa / FSK Note: One modulation method is required.
Available LoRaWAN Band	EU863-870, US902-928, AU915-928, KR920-923, AS923-1, AS923-2, AS923-3, IN865-867, CN470-510 Note: optional and need to be configured before shipment

---

**Wireless 4-Input 0-10V ADC Sampling Interface (powered by 2 x ER14505 3.6V Lithium AA battery)**

---

## Physical Properties

Dimensions	112mm (L) x 65mm (W) x 32mm (H)
Length of External Cable	1m
Weight	about 141g
Ambient Temperature	-20°C–55°C
Ambient Humidity	<90%RH (no condensation)
Mounting	Magnet/screws