

Wireless 3-Phase Current Meter with 3 x 75A Clamp-On CT R718N37D(E) Data Sheet

Wireless Sensor Network Based on LoRa Technology



R718N37D (undetachable cable)



R718N37DE (detachable cable)

Copyright©Netvox Technology Co., Ltd.

This document contains proprietary technical information which is the property of NETVOX Technology and is issued in strict confidential and shall not be disclosed to others parties in whole or in parts without written permission of NETVOX Technology. The specifications are subjected to change without prior notice.

Table of Contents

1. Introduction	3
2. Features	3
3. Applications.....	3
4. Dimensions	4
5. Electrical Specifications	5
6. Frequency	5
7. Clamp-On Current Transformer Parameter	6
8. Physical Properties	6

Wireless 3-Phase Current Meter with 3 x 75A Clamp-On CT

1. Introduction

R718N37D(E), the three-phase current meter, is to detect the current of three-phase load. The device is compatible with the LoRaWan protocol and equipped with a wireless communication module to display the collected data in the gateway. The R718N3xxD(E) series is powered by DC and receives AC through the solid-core/clamp-on current transformers (CTs), which proportionally convert high-voltage current in the primary winding into lower-value current into the second winding.

2. Features

- Clamp-on current transformer
- Detachable and undetachable cables for CTs
- DC power supply (input: AC 100V to 240V 50/60Hz, output: DC 3.3V/1A)
- IP30 main body and sensor
- SX1276 wireless communication module.
- Magnetic base
- LoRaWAN™ Class C compatible
- Configuring parameters and reading data via third-party software platforms, and set alarms via SMS text and email (optional)
- Available third-party platforms: Actility/ThingPark, TTN, MyDevices/Cayenne


3. Applications

- Indoor current detecting devices for homes, hotels, office buildings, shopping malls, etc.
- Smart city
- Thermal system equipment


Wireless 3-Phase Current Meter with 3 x 75A Clamp-On CT

4. Dimensions

Main body: L: 112mm x W: 88.19mm x H: 32mm

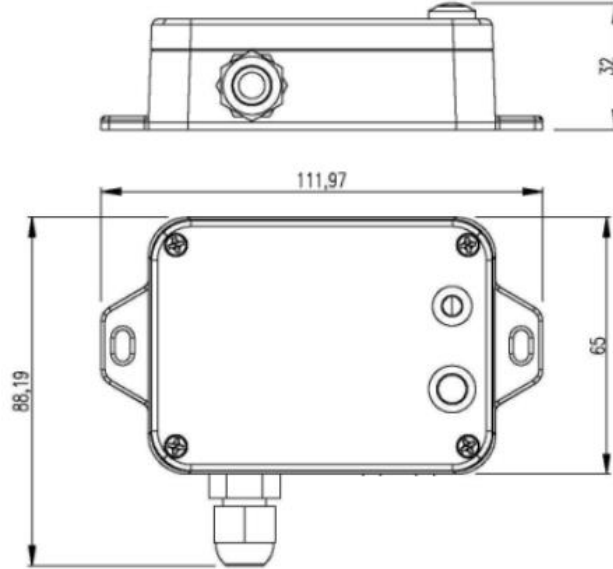

CT: H: 42.5mm x L: 27.5mm x W: 25mm

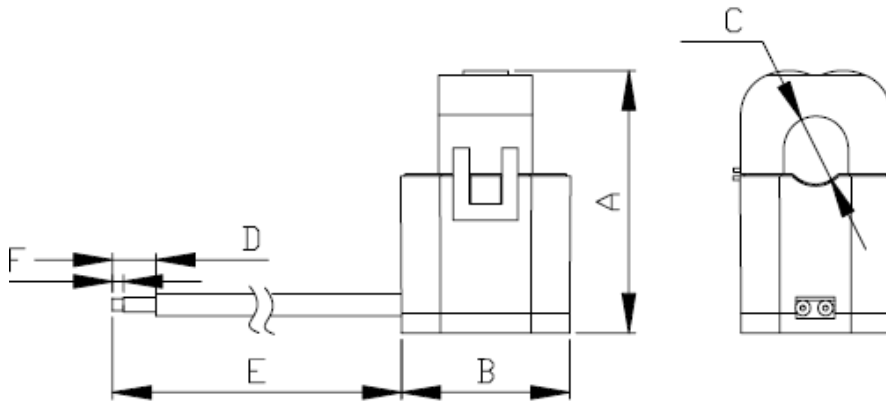

A	B	C	D	E	F
41max	27.5max	10±0.2	25±5	900±3	6±1

Wireless 3-Phase Current Meter with 3 x 75A Clamp-On CT

5. Electrical Specifications

Power Supply	DC 3.3V/1A
Power Consumption	≤ 0.5W
RF Receiving Current	11mA / 3.3V
RF Emission Current	120mA / 3.3 V
Current Measurement Accuracy	< ± 1% (within 300mA to 75A)
Current Resolution	1mA
Current Measurement Range	100mA to 75A

Note: Specific electrical characteristics may vary depending on the power supply voltage.

6. Frequency

Frequency Range	863MHz-928MHz 470MHz-510MHz
Power Output	19dBm±1dBm (max)
Tx Power	US915 20dBm AS923 16dBm AU915 20dBm CN470 19.15dBm EU868 16dBm KR920 14dBm IN865 20dBm
Rx Sensitivity	-136dBm (LoRa, Spreading Factor=12, Bit Rate=293bps) -121dBm (FSK, Frequency deviation=5kHz, Bit Rate=1.2kbps)
Antenna Type	Built-in antenna
Communication Range	10km (Actual transmission distance depends on the environment.)
Data Transfer Rate	LoRa: 0.3 to 50kbps FSK:1.2~300kbps (could be configured)

Wireless 3-Phase Current Meter with 3 x 75A Clamp-On CT

Modulation	LoRa / FSK (Note: Please can choose one modulation method.)
Available LoRaWAN Band	EU863-870, US902-928, AU915-928, KR920-923, AS923-1, AS923-2, AS923-3, IN865-867, CN470-510 (Note: optional, to be done in the factory configuration)

7. Clamp-On Current Transformer Parameter

Rated Primary Current	30A, 50Hz to 60Hz
Rated Secondary Current	10mA
Saturation Current	≥75A
Ratio	3000: 1
Load Resistance	10 Ω
Accuracy	1%
Electrical Strength	3000V
Housing Material	Flame Retardant Grade 94-V0 UL Material
Environmentally Friendly	ROHS compliant
Operating Temperature	-40 °C to 85 °C

8. Physical Properties

Dimension	Main body: L: 112mm * W: 88.19mm * H: 32mm Sensor: H: 42.5mm * L: 27.5mm * W: 25mm
Host body Weight	About 141g
Sensor Weight	About 49.6*3g
Sensor External Wiring Length	CT (undetachable cable): about 900mm CT (detachable cable): 1200mm
Ambient Temperature Range	-20°C to 55°C
Storage Temperature Range	-40°C to 85°C
Ambient Humidity Range	<90% RH (No condensation)
Mounting	Screw / Magnet