

Wireless Water Leak Detector - Rope Sensor with 1 x Digital Output

# Wireless Water Leak Detector - Rope Sensor with 1 x Digital Output

Wireless Sensor Network Based on LoRa Technology



## R900A03AO1 Data Sheet

**Wireless Water Leak Detector - Rope Sensor with 1 x Digital Output**

---

**Copyright©Netvox Technology Co., Ltd.**

This document contains proprietary technical information which is the property of NETVOX Technology and is issued in strict confidential and shall not be disclosed to other parties in whole or in parts without written permission of NETVOX Technology. The specifications are subjected to change without prior notice.

## Wireless Water Leak Detector - Rope Sensor with 1 x Digital Output

### Introduction

R900A03AO1 is a wireless temperature sensor with a digital output. It transmits digital signals to a third-party device when detecting water leak. With up to 7 flexible installation options, R900A03AO1 integrates easily into various environments. In addition, with support for Netvox NFC app, users can easily configure settings, update firmware, and access data simply by tapping their smartphone to the device.

### Features

- Powered by 2\* 3.6V ER18505 batteries (also support ER14505 batteries with battery converter case)
- Main unit: IP65
- Non-localization water leak detection
- Built-in vibration sensor for tamper alarm
- Up to 7 installation methods for different kinds of scenarios
- Support NFC. Configure and upgrade firmware on Netvox NFC app
- Store up to 10000 data
- LoRaWAN™ Class A compatible
- Frequency hopping spread spectrum
- Configuration parameters can be configured through third-party software platforms, data can be read, and alarms can be set via SMS text and email (optional)
- Applicable to the third-party platforms: Actility/ThingPark, TTN, MyDevices/Cayenne
- Low power consumption and longer battery life


Note: Battery life is determined by the sensor reporting frequency and other variables, please visit [http://www.netvox.com.tw/electric/electric\\_calc.html](http://www.netvox.com.tw/electric/electric_calc.html) for battery life and calculation.

### Applications

- Server room
- Warehouse
- Smart home
- Archive
- Data center

**Wireless Water Leak Detector - Rope Sensor with 1 x Digital Output****Dimensions**

R900 (main unit)

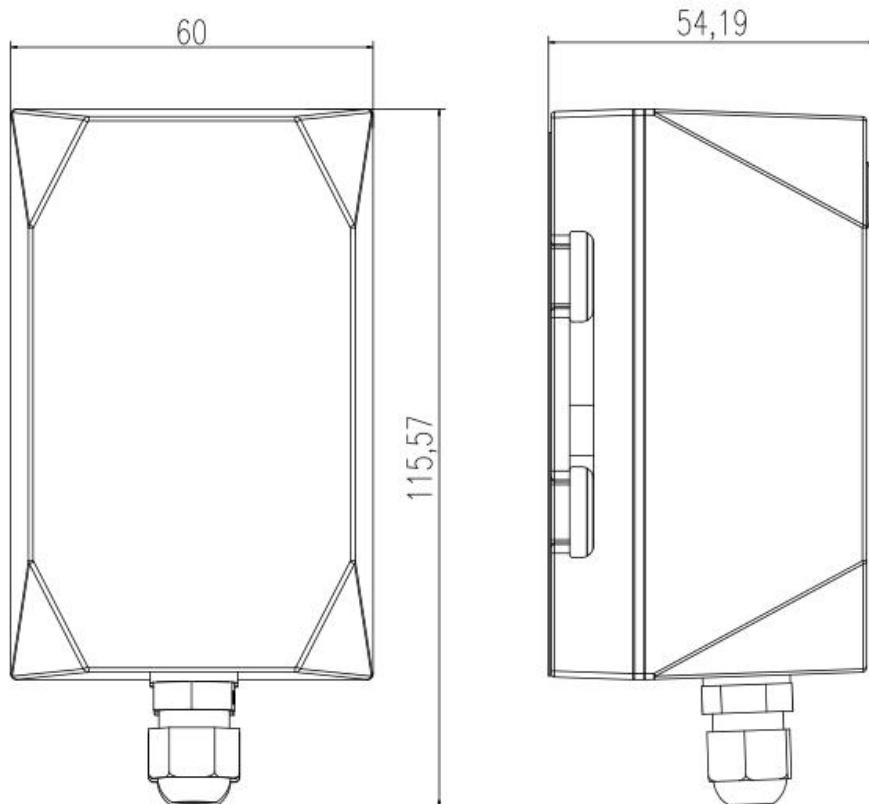

## Wireless Water Leak Detector - Rope Sensor with 1 x Digital Output

## Electrical Specifications

Power Supply	2* ER18505 3.6V 4000mAh lithium batteries in parallel (or 2* ER14505 3.6V 2400mAh lithium batteries with battery converter case)
Battery Lifespan	5.69 years (when powered by 2* ER18505 batteries, the temperature = 25°C, report interval = 15 minutes, TX power = 20dBm, and LoRa SF = 10)  Battery life may vary depending on the report interval, TX power, and spreading factor (SF). It can be calculated and updated according to the following website: <a href="http://elecalc.netvoxcloud.com:8080/electric_calc/electric_calc.html?lang=cn">http://elecalc.netvoxcloud.com:8080/electric_calc/electric_calc.html?lang=cn</a>
Standby Current	34uA
Wake-up Current	7mA
RF Receiving Current	12mA @3.3V
RF Transmitting Current	138mA @3.3V, TX power = 22dB
Low voltage alarm	3.2V
Battery Measurement Error	±0.1V

Note: The electrical specifications may vary due to the voltage of the power supply.

## Water Leak Rope Sensor

Materials	Conductive polyethylene and alloy
Operating Temperature (Max.)	75°C
Diameter	5.5mm
Length	3000mm (±5mm)
Fire Resistance Level	Class-2 Pressure Vented Cable
Quality	18g/m
Color	Orange
Breaking Strength	60kg
Detect Core Resistance	Less than 5 ohms/100 meters
Recommend Max. Length	300 meters (theoretical value)

**Wireless Water Leak Detector - Rope Sensor with 1 x Digital Output****Frequency**

Frequency Range	863MHz-928MHz 470MHz-510MHz
TX Power	US915 22dBm AS923 16dBm AU915 22dBm CN470 19.15dBm EU868 16dBm KR920 14dBm IN865 20dBm
RX Sensitivity	-123 dBm for 2-FSK (at 1.2 Kbit/s), -148 dBm for LoRa® (at 10.4 kHz, SF= 12)
Antenna Type	Built-in antenna
Communication Range	10km (line of sight) Note: The actual transmission distance depends on the environment.
Data Transfer Rate	FSK: 0.6 – 300Kbit/s Lora: 0.018 – 62.5Kbit/s
Modulation	LoRa / FSK Note: One modulation is required.
Available LoRaWan Band	EU863-870, US902-928, AU915-928, KR920-923, AS923-1, AS923-2, AS923-3, IN865-867, CN470-510 Note: configured before shipment

**Wireless Water Leak Detector - Rope Sensor with 1 x Digital Output****Physical Properties****Main Unit**

Dimensions	L: 115.57mm x W:60mm x H: 54.19mm
Ambient Operating Temperature	-20°C to +55°C
Ambient Storage Temperature	-40°C to +85°C
Ambient Humidity	<90%RH (no condensation)
Installation	Standard: <sup>(1)</sup> screws + bracket <sup>(2)</sup> screws <sup>(3)</sup> double-sided tape Optional: <sup>(1)</sup> magnet <sup>(2)</sup> DIN rail buckle <sup>(3)</sup> swivel bracket Prepared by customers: <sup>(1)</sup> cable tie

**Digital Output**

Cable Length	1m
--------------	----